

(19) World Intellectual Property  
Organization  
International Bureau



(43) International Publication Date  
16 June 2005 (16.06.2005)

PCT

(10) International Publication Number  
**WO 2005/054011 A1**

(51) International Patent Classification<sup>7</sup>: **B60R 19/02**

(21) International Application Number:  
PCT/SE2003/001847

(22) International Filing Date: 8 December 2003 (08.12.2003)

(25) Filing Language: Swedish

(26) Publication Language: English

(71) Applicant (for all designated States except US): **SSAB  
HARDTECH AB** [SE/SE]; S-971 88 Luleå (SE).

(72) Inventor; and

(75) Inventor/Applicant (for US only): **MUSKOS, Per**  
[SE/SE]; Östra Brunnsgatan 29, S-972 51 Luleå (SE).

(74) Agent: **ÅSLUND, Roland**; SSAB Hardtech AB, S-971 88  
Luleå (SE).

(81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

— with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: BUMPER BEAM AND A VEHICLE WITH SUCH A BEAM

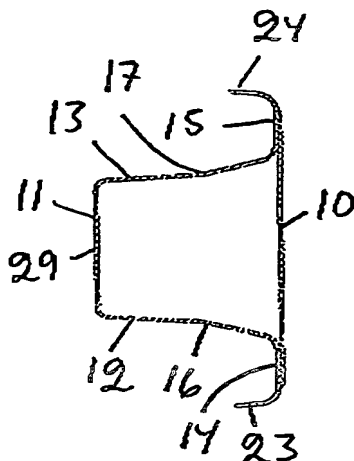

(57) Abstract: A front bumper beam for a vehicle comprises a hat profile (11,15) with a cover (10) and it has its cover facing forwards. The beam has a central portion (22) with lower profile than its side portions (20,21) and, as distinguished from the side portions, this lower central portion (22) has a reinforcement in the form of a bent edge (23,24) on at least one of the side flanges (14,15) of the hat profile.

WO 2005/054011 A1